MANUAL INSTRUCTION


Safety Notice:

1. Installation should be done by registered electricians.
2. Never touch the working luminaire
3. In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
4. Repairment should only be done by registered electricians or official service agent.


Include



Not Include

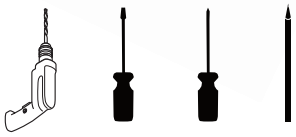


If In Series

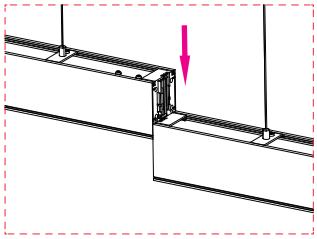

Item No.	Connection Qty Max(pcs)
SLL-18WSMD	40
SLL-36WSMD	20
SLL-48WSMD	16

This connection QTY refers to the case of direct 1 cable line, If more lamps need to be connected in series, just connect a few more wires;It is recommended that the load of one input line be less than 800W

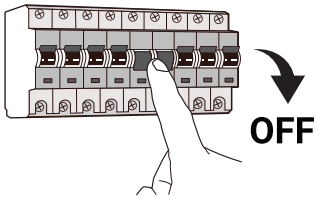


WARNING

Switch off the power supply before installation


Suspending

1

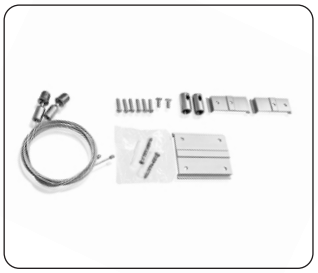


Step 1:Take the kit out of the box;

2

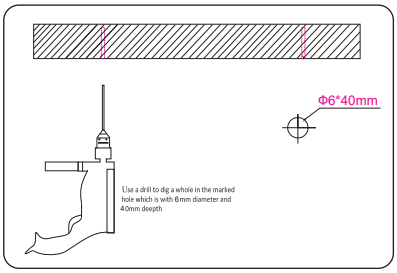


Step 2:Drill holes in the installation position;

3

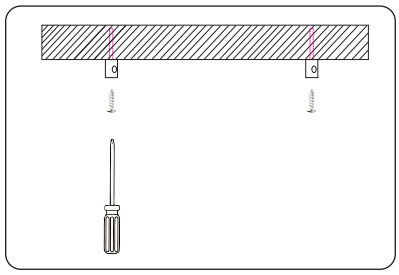


Step 3:Attach the ceiling holder to the ceiling with long screws;

4

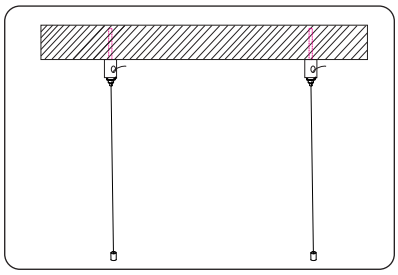


Step 4:Thread the wire rope into the top seat and tighten the wire lock on the top seat;

5

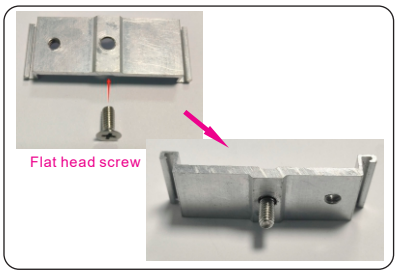

Step 5:Screw the flat head to the small aluminum piece;


6

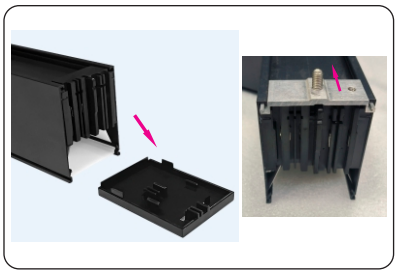

Step 6:Remove the protective cover from the side of the light fixture by hand, and then insert the small aluminum sheet;


7

If In Series

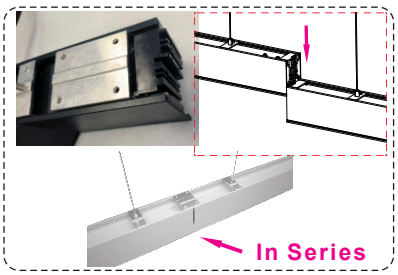


Step 7:If it is in series, it also needs to be loaded with large aluminum sheets;

8

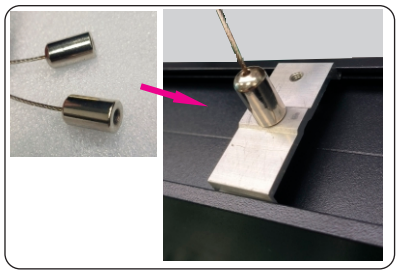


Step 8:Lock the lower end of the wire rope to the screw of the small aluminum piece;

9

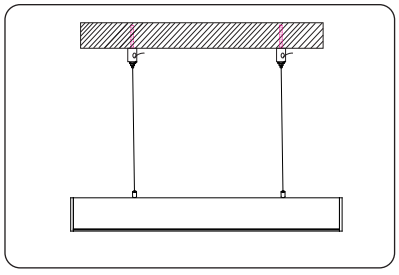

Step 9:Complete installation (rope height adjustable);

10

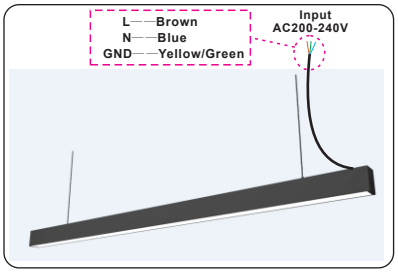

Step 10:Connect the lamp cable to the mains;

WARNING

Switch off the power supply before installation

